

DB 11 X4




Complete ballast, compliant with German standards
Zavorra completa a bordo, conforme alle norme di circolazione tedesche



19 m - 425 kg
17 m - 500 kg
15 m - 600 kg

DB 11 X4

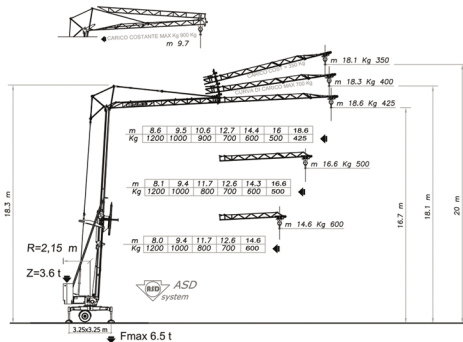

RADIUS, CAPACITY, REACTIONS

Dati tecnici Technical data		400 V Trifase 6 kW			230 V Monofase 4,5 kW			230 V Monofase 3 kW			Rotazione Slewing		0 - 1 ▶ rpm		1,5		
													ELECTRONIC FINE ADJUST.				
Sollevamento Hoisting		m/min	Kg	kW	m/min	Kg	kW	m/min	Kg	kW	Montaggio idraulico Hydraulic erection			kW 0,75			
		▲ 5 ▼ 5	1200		▲ 5 ▼ 5	1200		▲ 5 ▼ 5	1200					Dati elettrici Electrical data			
	2nd SPEED POWER	▲ 19 ▼ 19	1200	5,0	2nd SPEED POWER	▲ 14 ▼ 19	1200	3,7	2nd SPEED POWER	▲ 9 ▼ 19						1200	2,5
	2nd SPEED HIGH	▲ 24 ▼ 24	700	5,0	2nd SPEED HIGH	▲ 19 ▼ 19	700	3,7	2nd SPEED HIGH	▲ 13 ▼ 19						700	2,5
		▲ 36 ▼ 36	400		▲ 24 ▼ 36	400		▲ 20 ▼ 30	400					230 V - kW 3 230 V - kW 4,5 400 V - kW 6			
	ELECTRONIC FINE ADJUST.			ELECTRONIC FINE ADJUST.			ELECTRONIC FINE ADJUST.										
Correlio Travelling		0 ▶ 18 0 ▶ 32	1200 700	1,1	0 ▶ 18 0 ▶ 32	1200 700	1,1	0 ▶ 18 0 ▶ 32	1200 700	1,1							
		ELECTRONIC FINE ADJUST.			ELECTRONIC FINE ADJUST.			ELECTRONIC FINE ADJUST.									

EN 14439 C25 - D25 DIN 15018 - H1•B2/B3 - 15019 - 18800

